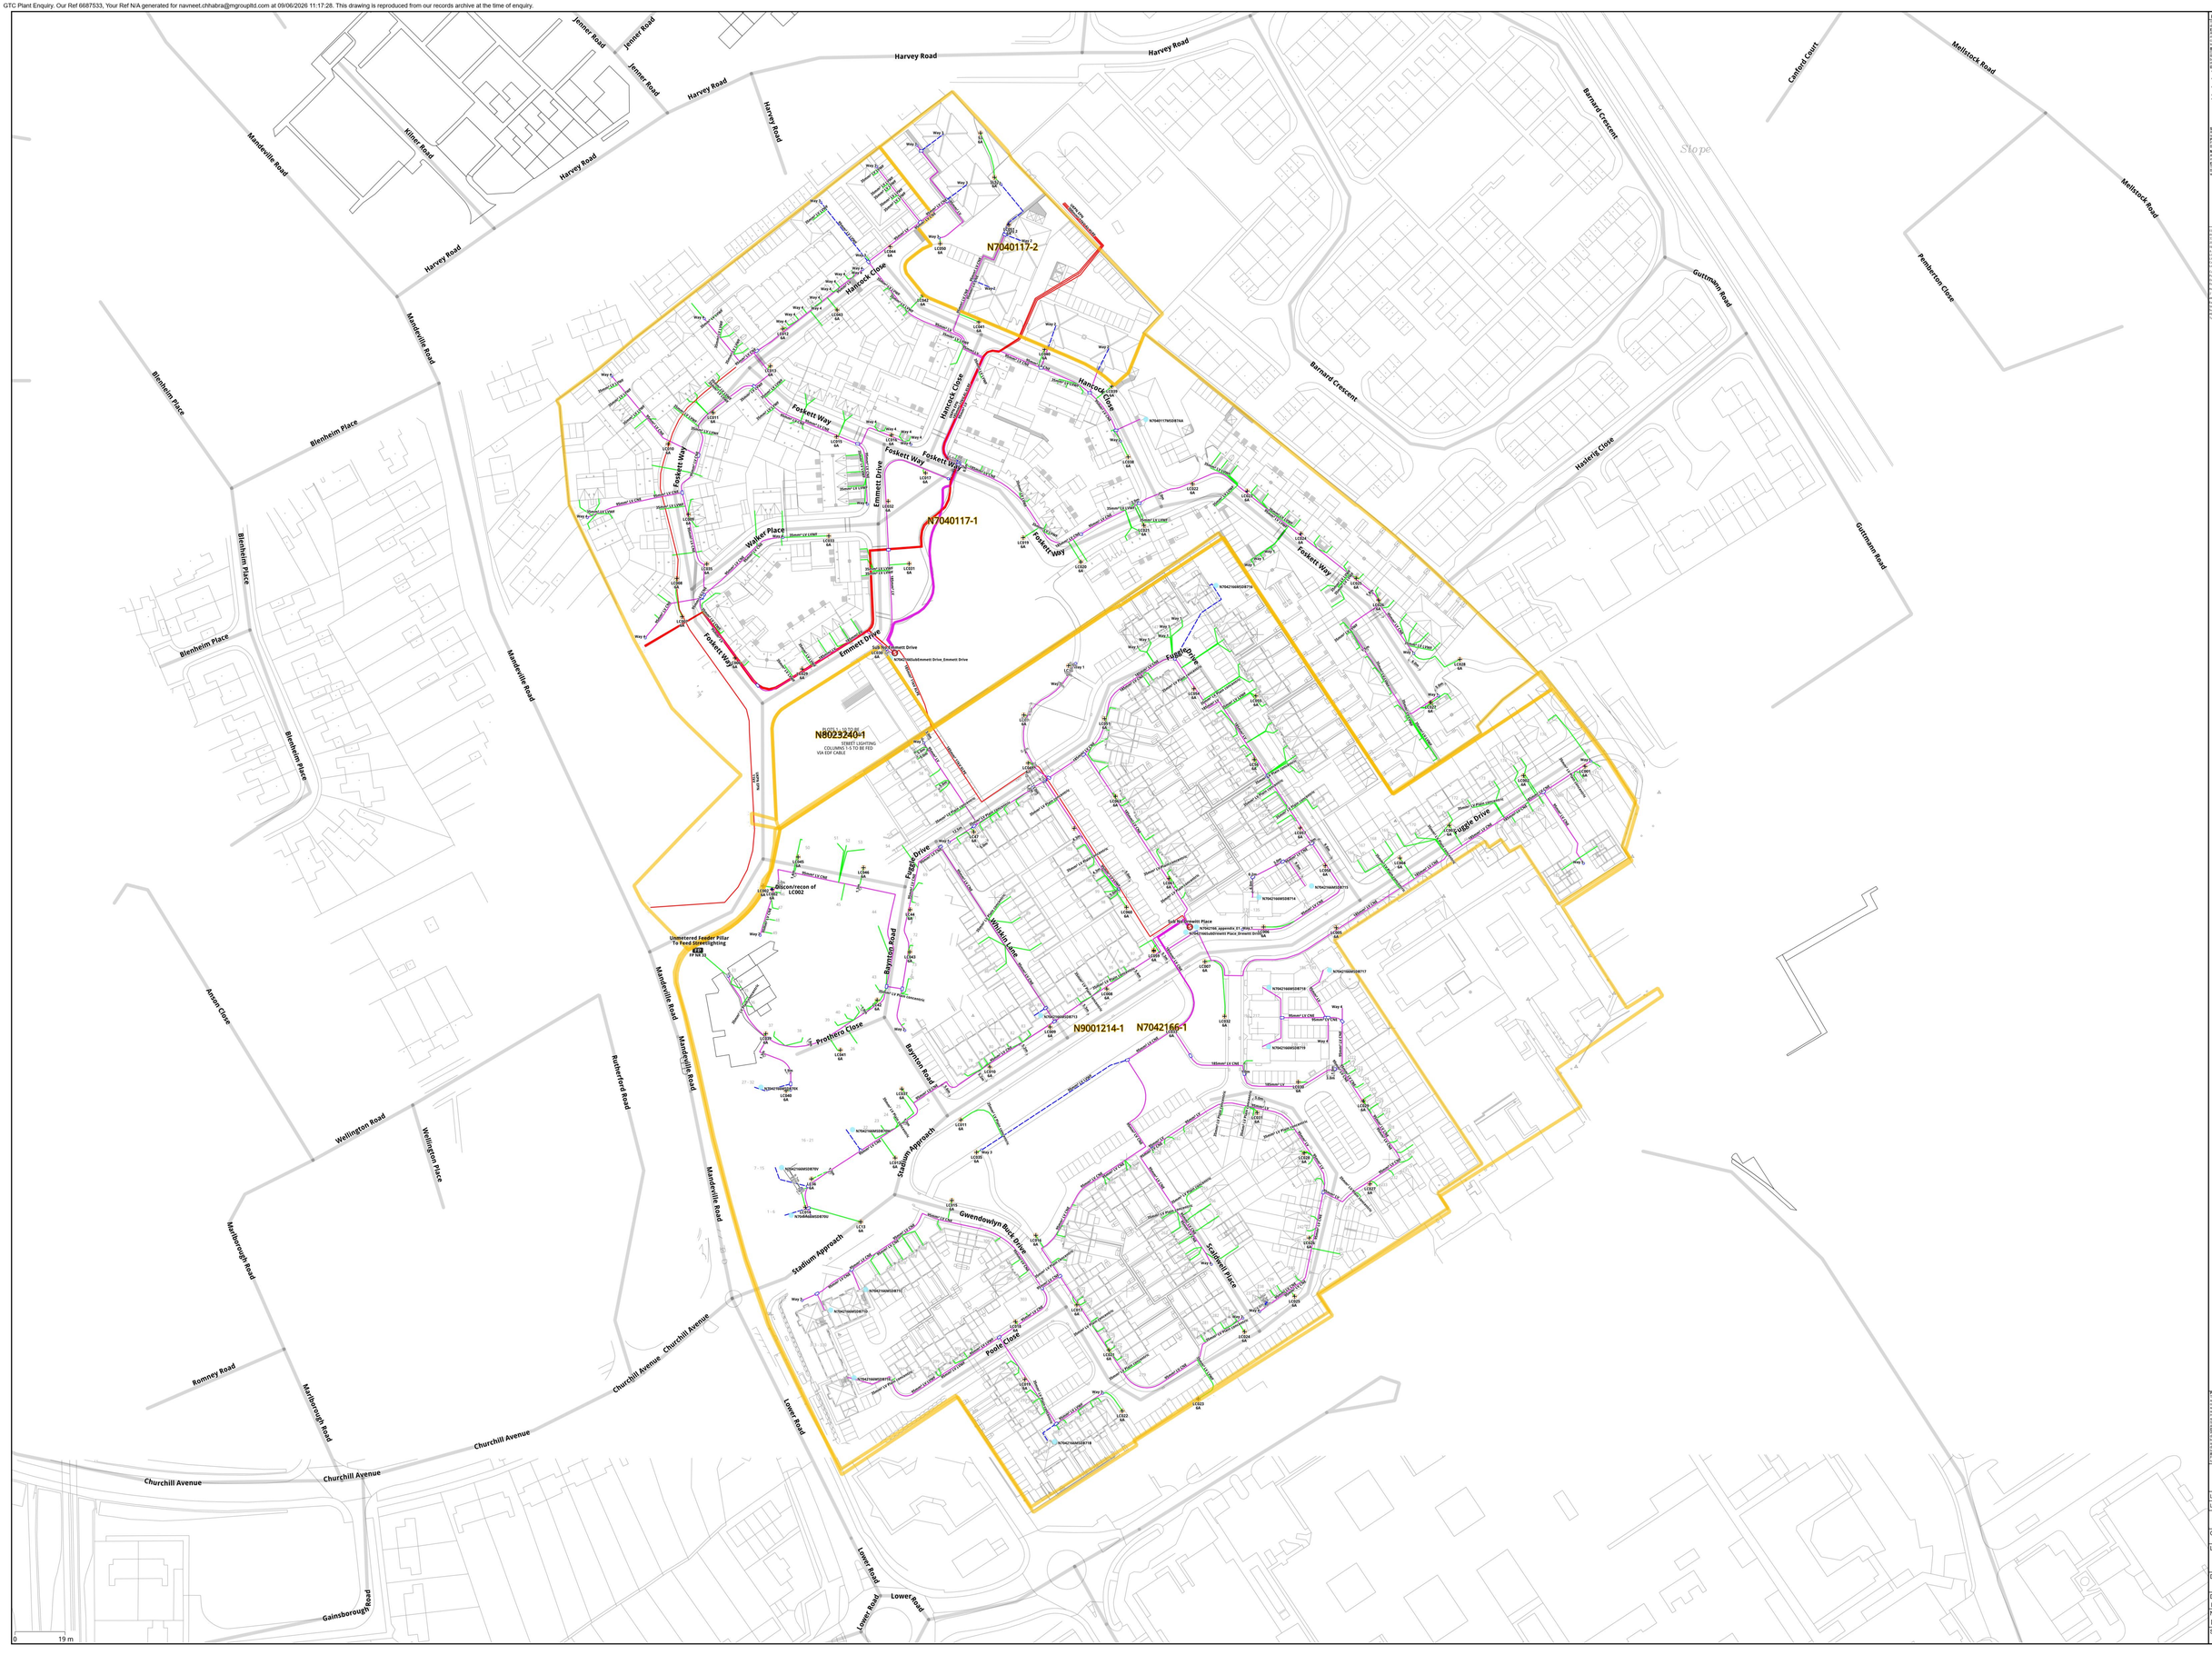

GTC Plant Enquiry. Our Ref 6687533, Your Ref N/A generated for navneet.chhabra@mgroupltd.com at 09/06/2026 11:17:28. This drawing is reproduced from our records archive at the time of enquiry.

Harvey Road
Jenner Road
Kilner Road
Mandeville Road
Blenheim Place
Barnard Crescent
Canford Court
Mellstock Road
Pemberton Close
Guttmann Road
Haslerig Close
Slope
Hancock Close
Foskett Way
Walker Place
Emmett Drive
N7040117-2
N7040117-1
UKPN EPN 11kV
Sub No.Emmett Drive
N7042166SubEmmett Drive_Emmett Drive
N8023240-1
PLOTS 1 - 10 TO BE
STREET LIGHTING
COLUMNS 1-5 TO BE FED
VIA EDF CABLE
Fuggle Drive
Whiskin Lane
Baynton Road
Prothero Close
Disconn/recon of LC002
Unmetered Feeder Pillar To Feed Streetlighting
FP NR 33
Sub No.Drewitt Place
N7042166_appendix_E1
N7042166SubDrewitt Place_Drewitt Drive
N9001214-1
N7042166-1
Stadium Approach
Gwendowlyn Buck Drive
Scaldwell Place
Poole Close
Anson Close
Wellington Road
Wellington Place
Rutherford Road
Marlborough Road
Romney Road
Churchill Avenue
Gainsborough Road
Lower Road
0
19 m

09-01-2025

This design is across multiple drawings for details please refer to all drawings.

Electric Notes
All electric mains, services and ducts that shall contain electric cables must be overlaid with electric identifiable marker tape laid 250mm above the cable / duct. Electric mains and services should have a minimum of 250mm separation to any other utility.

Backfill Specification
Directly buried cables should be surrounded by cable sand installed to BS EN 13139 - Aggregate size of 0/2mm to CAT 4. A 75mm layer should be placed on the bottom of the trench and a further 75mm above the top of the cable.

Ducting Specification

- Black ducting for mains shall be 150mm rigid plastic duting compliant with the ENA TS 12-24
- Ducting for LV single phase services shall be 38mm outside diameter black 'polyduct' compliant with ENA TS 12-24
- Ducting should be used when taking cables across roads and into buildings
- Ducts are shown on the drawing as a thick black line
- Only one cable is allowed per duct.

Electric cable	Outside Diameter
Single Phase	38mm
3 Phase LV	150mm
HV	150mm

Service Sizes
All service cables to properties are single phase 35mm² Al Cable terminated in 100 Amp cut out (except where specified).

Phase Identification
For colour convention mains, the connected phases will be shown as BR, BK, GY Where BR = brown / BK = black / GY = grey.

Material Specification
All cables, equipment and construction method on this network are to be in accordance with G81 documentation.

Excavation Carried Out by BUUK
The trenches highlighted in blue will be excavated and reinstated by BUUK contractors, the excavation and reinstatement of the other trenches will be the responsibility of the customer.

	Proposed	Laid
132kV Cable	– – –	▬
66kV Cable	– – –	▬
33kV Cable	– – –	▬
20kV Cable	– – –	▬
11kV Cable	– – –	▬
6.6kV Cable	– – –	▬
LV Mains & 3ph Services	– – –	▬
LV 1ph Services	– – –	▬
Copper Earth Cable	– – –	– – –
Live Cable	▬	▬
Cable Joint	☐	■
Pot End	○	●

Ducted Cable	▬
Excavated by BUUK Contractors	▬
Asset Boundary	▬
2 Way Link Box	⊞
4Way Link Box	⊞
Earth	⏚
Streetlight	+
Substation	S
Abandoned	/ / /
To Disconnect	✕ ✕ ✕
Internal	I
Meter Box	C
Kiosk	K
MSDB	M
Point Load	P
Unibox	U
Network Bouncdary Point	NBP
Shorting End Cap	▲
Feeder Pillar	FP

Plan Notes
This plan shows apparatus owned by the BUUK Group. Any third party apparatus indicated on these drawings is shown for indicative purposes only. The information shown on this plan is given without warranty, the accuracy cannot be guarenteed. No liability of any kind whatsoever is accepted by the company. Safe digging practices, in accordance with HS(G)47, must be used to verify and establish the actual position of apparatus. This plan is reproduced by the permission of Ordnance Survey on behalf of HMSO. © Crown copyright and database right 2007. All rights reserved Ordnance Survey Licence number 0100021063.

Developers Responsibility
When apparatus have been laid it becomes the responsibility of the developer to ensure it is suitably protected, therefire backfilling should be carried out as soon as possible. Replacement and repair of damaged apparatus, including administrative costs will be fully recharged to the developer. It will be the developer's responsibilityto recover the costs from the third parties.

Revision Notes
For a revision history of this network design please see seperate revision history document.

GTC, Woolpit Business Park,
Suffolk,
IP30 9UP

Tel: 01359 240363
www.gtc-uk.co.uk

Last Edit By:	
Last Approved By CAROL BEVAN	
Approved	
OS Ref:	482543,212027
Location:	Stoke Mandeveille Hospital 2
Developer/Client:	
Drawing Number/Title:	EN7042166-1_1_of_3_Entire_site_Rev6-8_appe
Network Number: N7042166	Project Number: N7042166-1
Scale: 1:750	Sheet Size: A0
Revision: 6-8	